

**Gysflash 30-12 HF is a 30A high power stabilised supply incorporating Inverter technology with 5 functions :**

- **Battery support:** sustains 12V (liquid or gel) automotive battery during diagnostic work
- **Advance battery charger:** ensures an ideal charging cycle for battery maintenance for the most modern vehicle
- **Showroom mode:** maintains batteries in showroom vehicles
- **In «battery change» mode,** will maintain electrical supply to preserve vehicle memory settings
- **High power stabilised supply:** voltage & current adjustable

## 5 Modes

- Charge
- Diagnostic
- Showroom
- Change batterie
- Power Supply

## Advanced features

- Automatic restart
- Cable test and calibration
- Showroom mode lock
- "Easy charge" mode
- Activate and adjust an "expert" charging curve
- Automatic SOS recovery for sulphated battery



## Intuitive interface

19 Languages available

## Slim size

The height of the charger (<11cm) enables to place it under vehicle.

## Cables

- Fitted with 2x2.5m - 6mm<sup>2</sup> cables
- It can be fitted with 2x5m - 16mm<sup>2</sup> and more. The calibration is automatic.

## TECHNOLOGY

High duty cycle  
**94%**

15% more energy




No external ventilation  
=  
No dust ingress



**Inverter - This technology enables :**

- A better duty cycle for a light waight (3.8kg).
- Shock and vibration absorbing feet.

## FEATURES

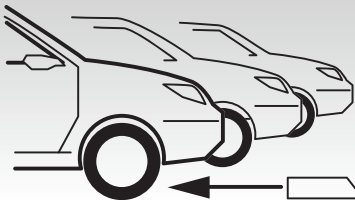

### Showroom Mode and reduced dimensions :

- Slim height (< 11 cm): to enable placement under vehicle.
- Showroom mode lock: to avoid mishandling ideal for garages and showrooms.
- Automatic restart: will automatically resume the mode from last position in case of power failure.

CE - EN 60335-2-29

50 / 60Hz	500 W	Icharge	40°C @100%	25°C @100%	12V	MIN. Ah	MAX. Ah	Charging Curve	BSU			Change Battery	IP	cm	kg
									Diag	Diag+	Showroom				
220-240 V AC	500 W	30 A			12V	10-400Ah	I <sub>U</sub> , I <sub>0</sub> , U	13,5V	12>14,8V	12,9V	40A	IP 21	25.5 x 23 x 10.5	3.8	